



NOTES:

1. PRECAST CONCRETE VAULT SHALL BE MANUFACTURED BY STAY-RIGHT TANK COMPANY OR APPROVED EQUAL. CONCRETE COMPRESSIVE STRENGTH SHALL BE 4000 PSI AT 28 DAYS. ACTUAL DIMENSIONS MAY VARY TO ACCOMMODATE VARIOUS MANUFACTURERS.
2. WATER METER SHALL BE NEPTUNE, MASTER METER, ABB OR APPROVED EQUAL. REGISTRATION SHALL BE IN GALLONS. COPPER METER SETTER SHALL BE FORD, MUELLER OR EQUAL. COPPER METER SETTER SHALL HAVE FLANGED VALVE ON INLET AND OUTLET.
3. BACKFLOW PREVENTER SHALL BE FEBCO SERIES 850 OR APPROVED EQUAL.

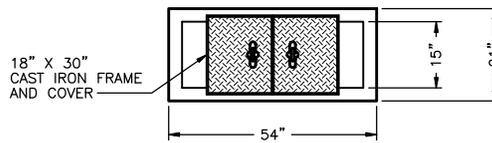

TOP VIEW

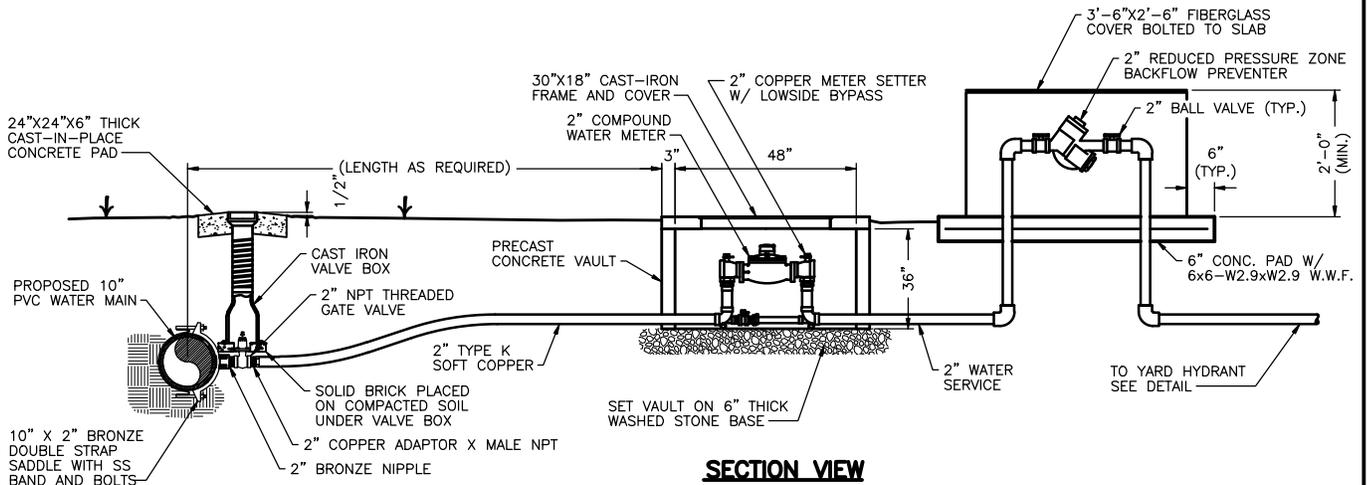

SECTION VIEW

2\"
REDUCED PRESSURE ZONE BACKFLOW PREVENTER (RPBP)
 N.T.S.

HOKE COUNTY REGIONAL
 WATER SYSTEM DETAILS
 HOKE COUNTY, NORTH CAROLINA

2 INCH WATER SERVICE DETAIL
 AND REDUCED PRESSURE ZONE
 BACKFLOW PREVENTER (RPBP)