




(4) 1" HOLES ON  
31" DIA B.C. EQUALLY  
SPACED 90° APART &  
(3) 1" DIA (25mm) HOLES  
ON 31" DIA B.C. EQUALLY  
SPACED 120° APART

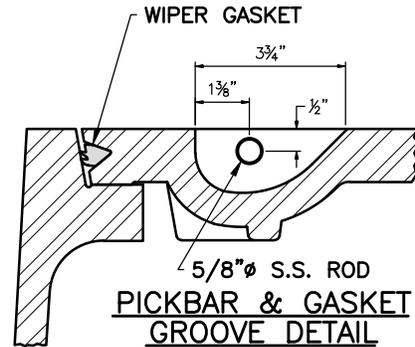

**COVER SECTION**

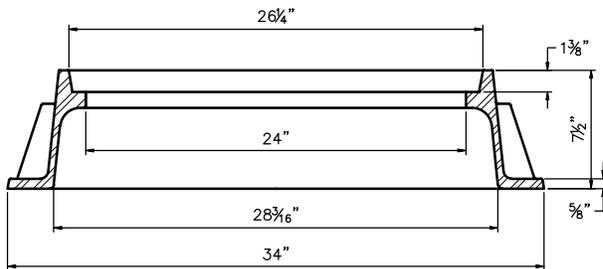

**FRAME SECTION**

**NOTES:**

1. MATERIAL: GRAY IRON CONFORMING TO ASTM A48 CL35B.
2. CASTINGS TO BE UNCOATED.
3. COVER TO MEET OR EXCEED AASHTO M-306 PROOF LOAD OF 40,000 LB.
4. ALL LETTERING TO BE CLEAN, CRISP AND CLEARLY LEGIBLE.
5. CASTING MANUFACTURER MUST BE EAST JORDAN IRON WORKS, INC. OR APPROVED EQUIVALENT.
6. CASTINGS TO BE MADE OF RECYCLED MATERIALS, 75% POST CONSUMER WASTE.

**EST. WT.**

COVER: 170 LBS 77kg  
 FRAME: 175 LBS 80kg  
 UNIT: 345 LBS 157kg

**MAT'L SPEC.**

COVER - GRAY IRON  
 ASTM A48 CL35  
 FRAME - GRAY IRON  
 ASTM A48 CL35

**HEAVY DUTY WATERTIGHT MANHOLE RING & COVER**

N.T.S.

HOKE COUNTY REGIONAL  
 SEWER SYSTEM DETAILS  
 HOKE COUNTY, NORTH CAROLINA

HEAVY DUTY WATERTIGHT  
 MANHOLE RING AND COVER